


Rental power unit 15kW SA 1922



- 15 kW
- Maximum flow rate
55 litre/min.
- Maximum pressure
210 bar

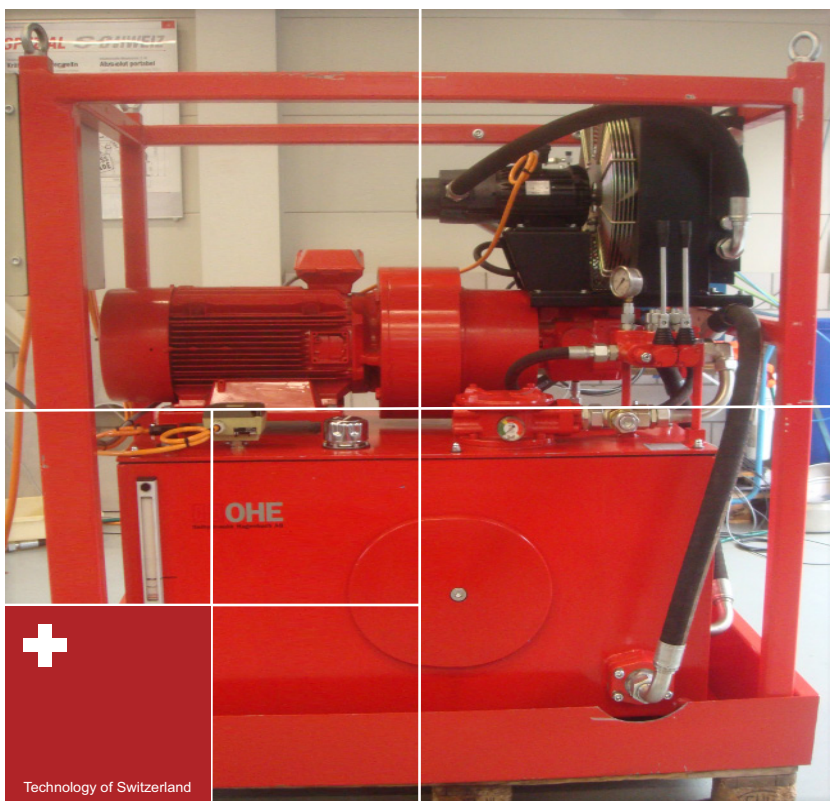

Technical data

Technical Data

Max. flow rate:	55 litre/min
Max. pressure:	210 bar
Pump pressure control:	Adjustable using adjusting screw
Pump flow rates:	Adjustable using adjusting screw
Return filter:	3 Micron
Filter and cool-circle:	40 l/min., air cooler
Cooling output:	About 6 kW (at 25° room temperature or 0.26 kW/°C)
Oil-temperature control:	Cooler starts/stops automatically
Oil tank:	300 litre
Additional tank connections:	2 connections in different sizes
Fill level monitor:	Automatically shuts off if level drops too low
Dimensions in mm (LxBxH):	1400x900x1600
Weight:	475 kg (without oil)

Electrical connections

1 x CEE-plug 32 A (400VAC / 50Hz), with cable l= 6m

Hydraulic connections

Pressure connections A:	2 x Ermeto 16 S (or R1/2")
Pressure connections B:	2 x Ermeto 16 S (or R1/2")
Return connection:	Ermeto 35 L (28 L), on return filter
Tank connection:	1 x R 1/2"
Tank connection:	1 x R 3/8"

Special

- Axial piston pump with adjustment screw for adjusting the maximum pressure and for adjusting and/or limiting the piston displacement
- Separate temperature-controlled filter-cooling circuit
- Fill level monitor with automatic cut-off
- Emergency stop-button on aggregate
- Pump can be activated and de-activated with buttons
- Valve block with 2x 4/3-direction manually controlled valves, locking
- Additional pressure relief valve on the valve block





Technical data

Accessories / parts subject to wear

Replacement filter cartridge	1 piece (Schroeder)
Filling and air vents	1 piece (Art.-No. 62.1073.6140)

Prices

Fr. 250.00/week

Commitment fee Fr. 80.00

Filter and Hydraulic oil are not included in the rental price



Hagenbuch Hydraulic Systems AG, Rischring 1, CH-6030 Ebikon, Tel. +41 (0)41 444 12 00, Fax +41 (0)41 444 12 01

info@hagenbuch.ch
www.hagenbuch.ch

HAGENBUCH 
Hydraulic Systems

201906/V02/D